




**COMPLETE :** DC rectified and AC voltages available simultaneously.

**PRACTICAL :** AC and DC power-on indicators.

**PROTECTED :** The DC rectifier output and the AC outputs are protected by auto-reset thermal circuit-breakers.

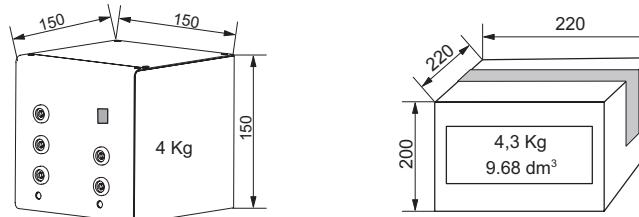

**120 WATTS**  
6V 20A  
12V 10A  
DC and AC

## Specifications

### DC outputs

- Floating outputs on 4 mm safety sockets.
- Two switchable outputs : 6 Volts or 12 Volts.
- Voltage rectified only
- Indicator : green power-on LED indicator.

### Current

- Max I : 20A at 6V output.
- : 10A at 12V output

### Protection

- Short circuit protection by current limiting,
- Overcurrent protection on source by fuse on main input

### AC outputs

- Floating outputs on 4 mm safety sockets.
- Two outputs with common point.
- Voltages : 6 Volts and 12 Volts + or - 5%.
- No-load voltage 10% maximum.
- Indicator: green power-on LED indicator.

## Other specifications

- |                 |   |   |
|-----------------|---|---|
| • Safety        | : Class II, double insulation<br>Complies with EN 61010-1, overvoltage category II, pollution degree 2. | • Power consumption : 145 VA max.                       |
| • EMC           | : Complies with EN 61326-1, performance criteria B, and EN 55011, ISM Group I, Class B.                 | • Protection : against overcurrent at the input by fuse |
| • Input voltage | : 230V ±10%, 50 / 60 Hz.  | • Protection level : IP 30                              |
| • Mains input   | : double insulation cord with 2 poles immovable.  | • Dielectric strength : 3000V between input to output.  |
|                 |   | • Presentation : Metal case with epoxy finish           |