




20 to 60MHz hand-held oscilloscope multimeter

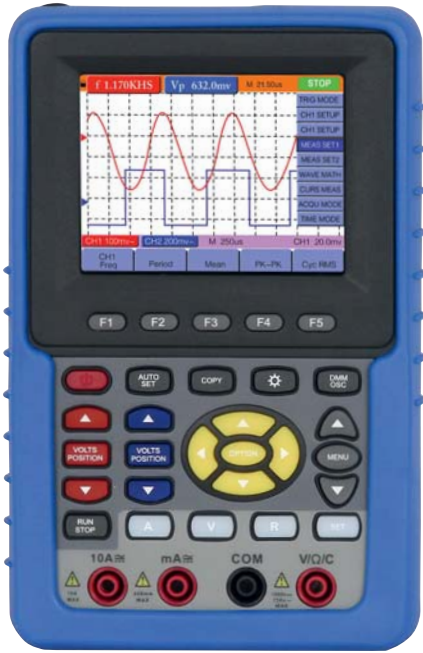

RS-232 USB

- Colour screen 75 x 56mm, 640 x 480 points
- Save/Recall 4 waveforms & 4 setup
- Zoom on the window. Choise of the window and zoom as far as 5ns/div
- Autoset and Autoranges, auto. measurements, cursors
- Digital multimeter TRMS

REF.	1022MN
Channels	2
Bandwidth -3dB	20MHz
Rise time	17.5ns
Sampling rate	100MSa/s
Record length by channel	6.000 points
Vertical resolution	8 bits
Sensitivity	5mV to 5V/div in séquence 1 - 2 - 5
Modes	Auto., normal, single, edge ↑↓, video
Fonctions Math - FFT	± x ÷ FFT
Mesures automatiques	20
Measurement cursors	V1/zero V2/zero ΔV T1/zero T2/zero ΔT
Fonctions Autoset	yes
Interfaces	USB - RS232
Multimeter	VDC - VAC - IDC - IAC - RΩ - CμF - Test diodes
Power source	Battery Li-ion. Operate time 6 hours.
Dimensions / Weight	180 x 113 x 40mm / 700g
Supplied with	2 oscilloscope probesx1 & x10 / 2 test leads for multimeter / Mains adaptor / USB lead Capacitance adaptor / Shunt 20A / Software / Transport case / User's manual.

ADDITIONAL ACCESSORIES

Differential probes



probes



Coaxial accessories

